




PSA-631

User's Instruction

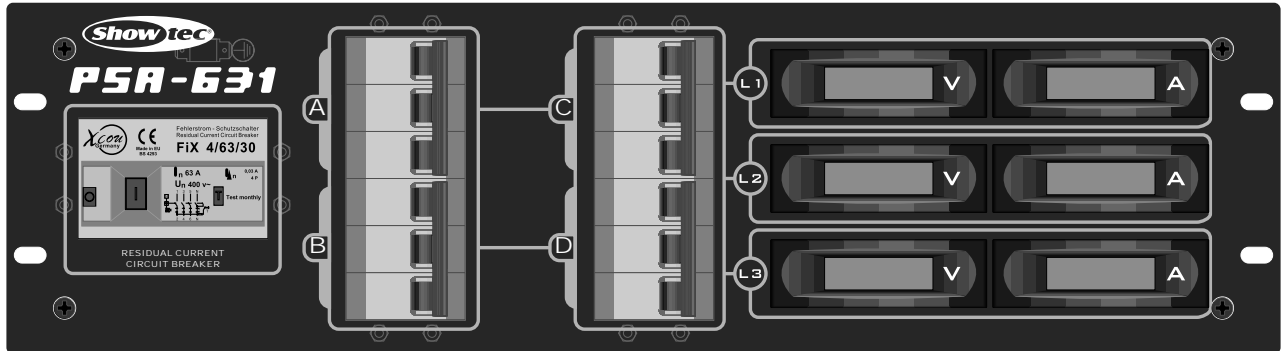

Descriptions:

This is a 63 A three-phase power splitter with 1 CEE 3x 63A/400V input and 4 CEE 3x 32A/400V output. Each output is protected by a 32A multi9 circuit breaker and each phase can be read out by a 4-digit voltmeter and a 4-digit ammeter as well. Furthermore, a residual current/circuit breaker is used for protection against electronic shock under fault conditions.

Specifications:

Housing:	Sheet steel body and metal front panel
Coating:	Coated with blue epoxy powder paint
Input:	3x 63A (3P+N+E) 2m H07RN-F cable 5G10 with PCE-plug 035 63A 5p 6h 400V
Output:	3x32 A (3P+N+E) 4 CEE-sockets 125 32A 5p 400V
Read-out:	A 4-digit voltmeter & 4-digit ammeter per phase
Safety Device:	XCOW FIX4/63/30 residual current circuit breaker & 32A C45N multi9 Circuit Breaker per output
Mounting:	19" rackmount/3U
Net Weight:	Approx 9.5 Kg

Warning!

This apparatus must be earthed.
Risk of electric shock, disconnect input power before opening.
To prevent fire or electric shock, do not expose this apparatus under a high temperature or moisture area.



24-004-0887

Rev 1.1