

OPUS® SP5

PROFILE MOVINGHEAD



FEATURES

- ▶ Super bright Profile Moving Head with 15.000 lm output and huge illuminance of 39,000 lux @ 5 m
- ▶ Advanced CMY colour mixing system plus colour wheel with 7 dichroic filters
- ▶ Linear CTO correction from 6,500 - 2,600 K for authentic tungsten emulation
- ▶ High quality optics with 130 mm front lens and extra wide 6° - 42° zoom range
- ▶ Even and flat projection field without hot spots at any zoom angle
- ▶ 4-blade framing system with +/- 45° rotation
- ▶ Angle and position of each shutter blade individually controllable up to full blackout
- ▶ Animation wheel module to replace framing shutter (available as accessory)
- ▶ Rotating gobo wheel with 7 replaceable indexable glass gobos + open
- ▶ Static gobo wheel with 8 replaceable glass gobos + open
- ▶ Rotatable and indexable 3-facet circular prism plus 6-facet linear prism
- ▶ Variable frost for wash-like effects plus stepless iris
- ▶ Ultra smooth 16-bit dimming with 4 selectable curves
- ▶ Flicker-free operation thanks to selectable PWM frequencies up to 25 kHz
- ▶ Battery powered touchscreen display plus 6 touch buttons for offline configuration
- ▶ Flexible control via built-in W-DMX™ transceiver, DMX, RDM, Art-Net or sACN

DESCRIPTION

Producing brilliant, lively colours, the super bright Cameo OPUS® SP5 profile moving head is your ideal multi-purpose tool for precision illumination with a rich variety of effects. It is equipped with a powerful 500 W cool white LED engine, a CMY colour mixing system and linear CTO correction. An additional colour wheel with 7 dichroic filters enables instant colour changes and split colour beams. The luminaire has an enormous 15,000 lm output, huge illuminance of 39,000 lux at a distance of 5 meters and rapid 540° pan and 270° tilt movement.

Fitted with a 130 mm front lens, the OPUS® SP5 achieves an amazingly uniform flat projection.

Permitting extensive beam control, it features an extra wide zoom range from 6° to 42° , stepless iris and a continuously variable frost filter that provides soft, wash-like diffusion.

To create a rich variety of geometric shapes, the OPUS® SP5 features a framing system with 4 shutter blades which can each be moved and angled independently within the frame or gradually closed for total blackout. Allowing precise shape orientation, the whole system can be rotated by +/- 45°. Two gobo wheels with 7 rotating and 8 static glass gobos generate stunning morphing effects when used simultaneously. For amazingly vivid projections, they can be used in combination with an animation wheel that is available as accessory to replace the framing shutter system. In addition to a rotatable and indexable 3-facet circular prism and a 6-facet linear prism to multiply gobo projection, the luminaire includes 16-bit dimming with a choice of 4 curves.

The OPUS® SP5 offers flexible control options via DMX, RDM, Art-Net, sACN or the built-in W-DMX™ transceiver. It has a rugged ABS and metal housing with temperature controlled low-noise fan, Neutrik® DMX and powerCON TRUE1 connectors and sports a battery-powered touchscreen display with 6 additional touch buttons for convenient offline configuration and two modes of menu navigation. The luminaire comes with two omega brackets and power cord.

Features and specifications
subject to change without notice.



adamhall.com

OPUS® SP5

PROFILE MOVINGHEAD







PHOTOMETRICAL DATA

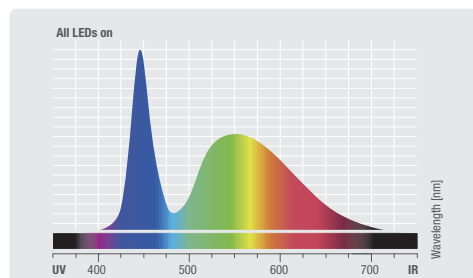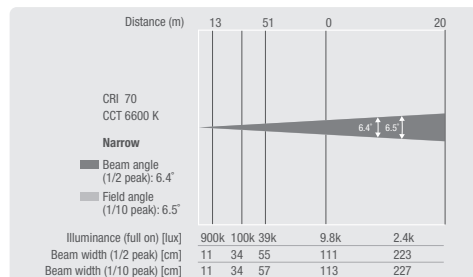

Luminous flux		Chromaticity coordinates	
All LEDs on	15000 lm	xy	0.309 0.326

SPECIFICATIONS

Product type	LED Moving Lights
Type	Moving Head
Colour spectrum	Cold white
Number of LEDs	1
Colour temperature	6600 K
LED type	500 W
Refresh rate	Adjustable to 25000 Hz
Dispersion	6 - 42 °
DMX input	XLR 3-pin male, XLR 5-pin male
DMX output	XLR 3-pin female, XLR 5-pin female
DMX mode	27-channel, 33-channel
DMX Functions	Auto Movement, CTO, Cyan Fine, Device Settings, Focus, Framing Blade Rotation, Magenta, Magenta Fine, PAN, PAN FINE, Rotation Fine Gobo Wheel 1, Set Dimmer Curve, TILT FINE, Yellow Fine, Animation Wheel, Colour wheel, CTO Fine, Cyan, Dimmer, Dimmer Fine, Focus Fine, Framing Blades, Frost, Gobo Wheel 1, Gobo Wheel 2, Iris, Prism, Rotation Gobo Wheel, Rotation Prism, strobe, TILT, Yellow, Zoom, Zoom Fine
PAN movement	540°
TILT movement	270°
High Speed Strobe	> 20 Hz
Standalone modes	Static, Auto Mode, Device Settings
Controls	Touch Display, Enter, Mode, Value Down, Value Up
Indicators	Touch-Graphic Display
Operating voltage	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption	800 W
Efficiency	29.6 lm/W
Ambient Temperatur (operating)	-15 - 45 °C
Power connector	Neutrik powerCON IN / OUT
Housing material	ABS plastic, metal
Cabinet colour	Black
Protection class IP	IP20
Cooling	Heat-pipe cooling system with temperature controlled fans
Illuminance	100,000 lx @ 3m, 39000lx @ 5m
Luminous flux	14800 lm
Width	380 mm
Height	710 mm
Depth	250 mm
Weight	27.8 kg
Accessories (included)	2 x Omega Clamp, power supply

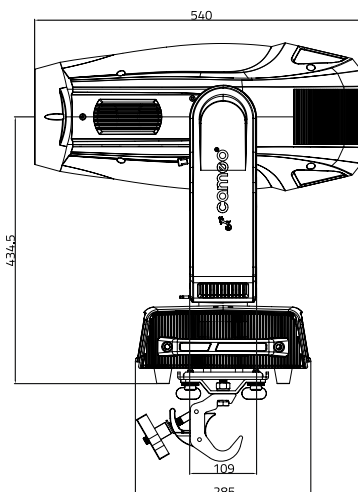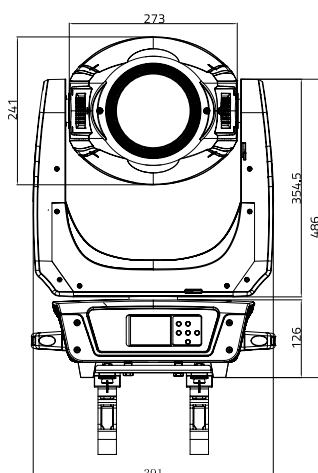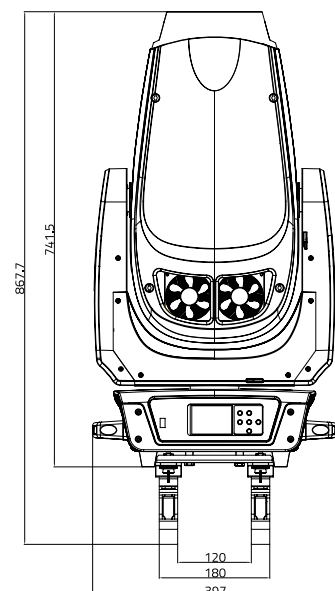

Features and specifications
subject to change without notice.

adamhall.com